



# Modular Ice Machine up to 309 kg

Item #:
Project:
Quantity:



#### **FEATURES**

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 607 Dice 10 g L 22 x P 22 x H 22 mm

CONDENSING SYSTEM	RECOMMENDED BINS				
	Head	Bins		kg	
Air cooled	NW 607	<b>✓</b>	SB393	181	
		~	SB530	243	
		CBT48EAMCD	SB948	406	



NW H 607 Half Dice 6 g L 10 x P 22 x H 28 mm R290

**REFRIGERANT GAS** 



NW L 607 Large Dice 15 g L 28 x P 22 x H 28 mm **VOLTAGE** V/Hz/ph

230/50/1

#### **LEGEND:**

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxxx : need additional bin top

### Certifications:



W
ATS 5200.105 WM 40188

# **OPERATING REQUIREMENTS**

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

### IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store


www.scotsman-ice.it www.scotsman-ice.com





# Modular Ice Machine up to 309 kg

Item #: Project: Quantity:

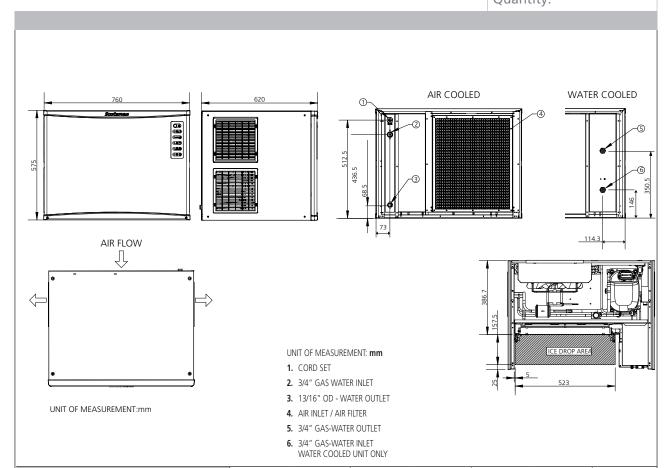

### **UNIT DATA**

Size (W x D x H) 760 x 620 x 575 mm

Net weight 76 kg

		Compressor		Circui	Max. fuse size	
Version	Voltage	Btu/h	w	No.	Ømm²	Α
NW 607 AS	230/50/1	9682	2839	3	1.5	16
NW H 607 AS	230/50/1	9682	2839	3	1.5	16
NW L 607 AS	230/50/1	9682	2839	3	1.5	16

## SHIPPING DATA

Carton (W x D x H) 830 x 690 x 740 mm

Weight 89 kg

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 607 AS	Air	230/50/1	294	276	216	10,4	22,81	14,3	1050
NW H 607 AS	Air	230/50/1	309	285	230	9,94	22,85	15,8	1050
NW L 607 AS	Air	230/50/1	275	253	203	10,8	22	13. <b>5</b>	1050

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions